


斜孔式鎖模塊

LOCKING BLOCKS WITH ANGULAR PINS HOLE



塑膠模
用

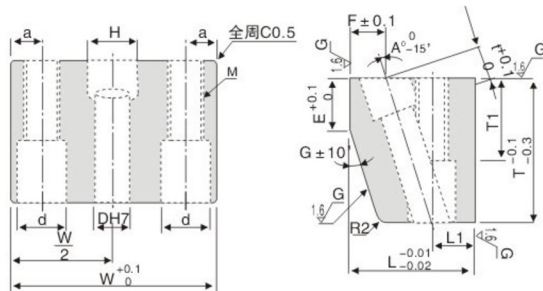

Material	Hardness	Heat Treatment
M材質	硬度	熱處理
SKS3	HRC53°-56°	真空處理 Vacuumed

Dh7	H	F	t	T1	d	M	a	L1	L	Catalog No.		T	W	E appoint 1mm unit	appoint 1° unit	
										Type	D				A	G
10	$+0.015$ 0	14	10	20					32	JH054	10	30	10~20	10°~20°	$G^{\circ} \geq A+2$ and $G^{\circ} \leq A+5$	
									35			35				
									36			40				
13		17	12	10	14	10	9	14	40	JH054	13	50	10~40	10°~20°	$G^{\circ} \geq A+2$ and $G^{\circ} \leq A+5$	
									40			35				
									40			40				
									45			50				
									50			60				
16	$+0.018$ 0	20	15	13	30	17	12	12	16	JH054	16	35	10~25	10°~20°	$G^{\circ} \geq A+2$ and $G^{\circ} \leq A+5$	
									45			40				
									50			50				
									55			60				

●Order: Catalog No. \square × \square × \square × \square × \square × \square

備注: 1.圖面以外之特殊規格可定制。
2.依客戶來圖報價。

Remark: 1. Special product is available.
2. The price is per the provided drawing.