

Material M材質	Hardness 硬度
H-13	HRC38° ~42°

Inch


Type	尺寸/dimension						
	T +.010 -.000	W +.010 -.000	L	MT MIN.THK	HT	R	SERIES (MW)
JHN52-2001	3/8	1/4	8"	.250	.156	.250	0.25
JHN52-2002	1/2						
JHN52-2003	3/4						
JHN52-4001	1/2	1/2	14"	.500	.187	.406	.500
JHN52-4002			8"				
JHN52-4003		1"	14"				
JHN52-4004		8"					
JHN52-4005	1"	1/2	14"	.625	.375	.875	1.000
JHN52-4006			8"				
JHN52-4007	1 1/2	1 1/2	14"	1.000	.375	.875	1.000
JHN52-4008			8"				
JHN52-4011	3/4	1 1/2	14"	1.000	.375	.875	1.000
JHN52-4012			8"				
JHN52-4013	1 1/2	3/4	10"	1.000	.375	.875	1.000
JHN52-4014			18"				
JHN52-8001	1"	1 1/2	10"	1.000	.375	.875	1.000
JHN52-8002			18"				
JHN52-8003	1 1/2	1"	10"	1.000	.375	.875	1.000
JHN52-8004			18"				
JHN52-8005	1 1/2	1"	10"	1.000	.375	.875	1.000
JHN52-8006			18"				

Type	尺寸/dimension						
	T +.25 -.00	W +.25 -.00	L	MT MIN.THK	HT	R	SERIES (MW)
JHN52-1001	10	10	250	10	5	10	10
JHN52-1002	15	15	250	15			
JHN52-1003	20	20	400	20			


Type	尺寸/dimension					
	D +.000 -.001	L	MT MIN.THK	HT	R	SERIES (MW)
JHN52-2101	7/16Dia.	8"	.312	.156	.250	.250
JHN52-4111	3/4Dia.	8"	.500	.187	.406	.500
JHN52-4112	3/4Dia.	14"				
JHN52-4113	3/4Dia.	18"	1.000	.375	.875	1.000
JHN52-8101	1 1/4Dia.	10"				
JHN52-8102	1 1/4Dia.	18"				

Type	尺寸/dimension					
	D +.000 -.025	L	MT MIN.THK	HT	R	SERIES (MW)
JHN52-1101	15Dia.	250	10	5	10	10

广泛应用于小型精密及超重量级模具，可进行组合以满足多种模具要求。  
Apply widely to minitype precision mold and super weight mold, they can be combined to meet the needs of kinds of mold.

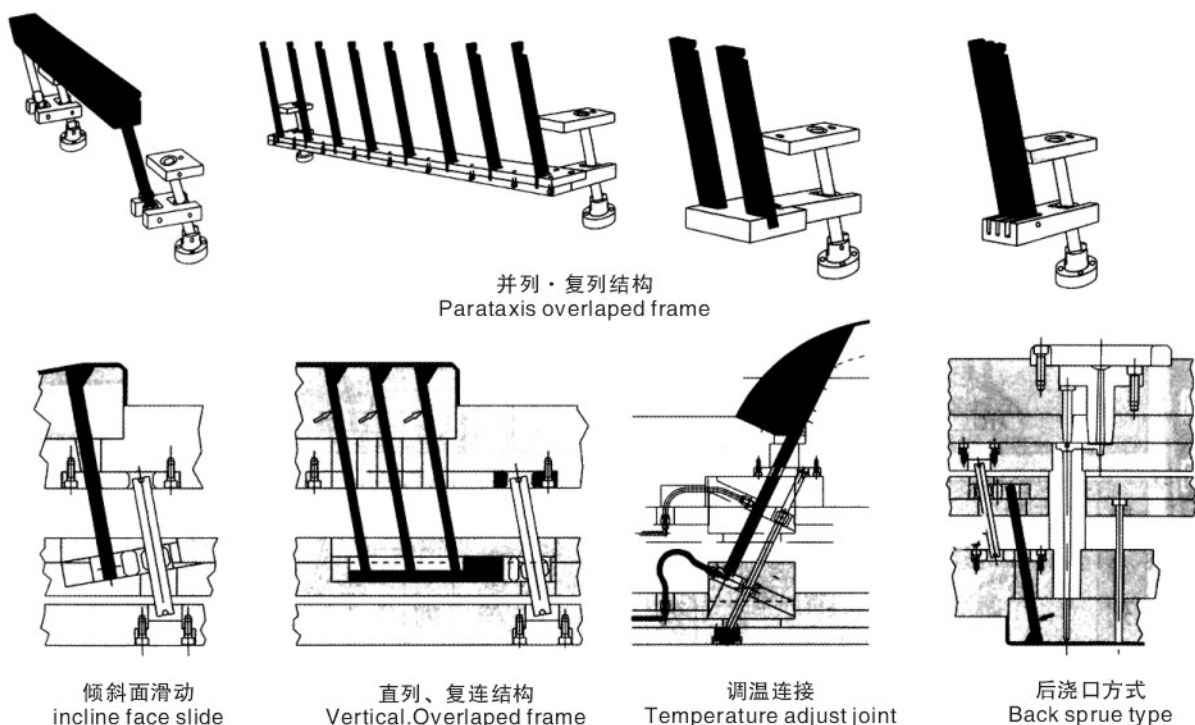

滑块改为活型芯控制装置 slide block change into flexible core control device.

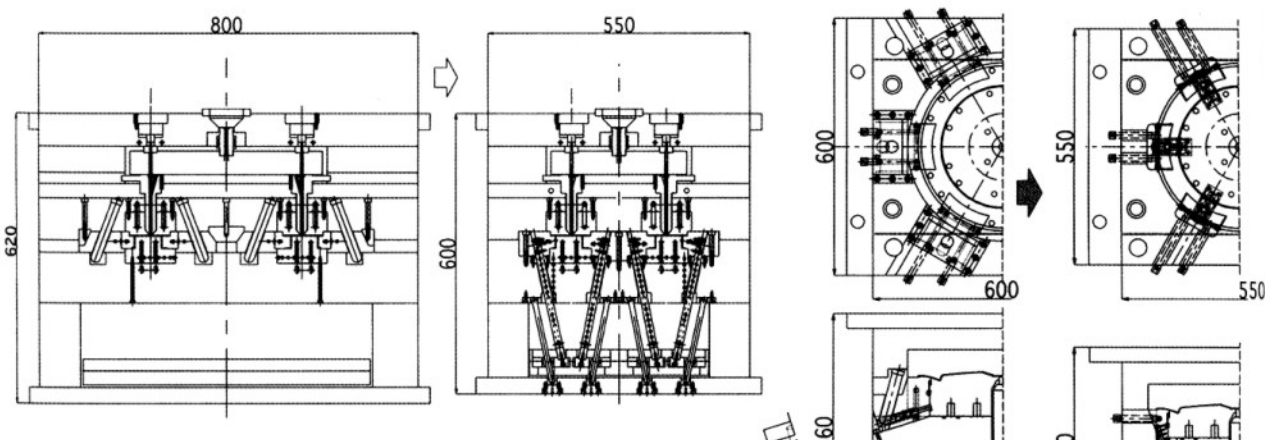

将以前的结构改为“活型芯控制装置”  
Change former frame into "flexible core control device"  
将普通的滑块改为“活型芯控制装置”，由于采用了活型芯，另一侧相配零件(斜导柱、锁紧块等)就不需要了，使其便于装配。此外，使模具尺寸减小，动作安全平稳，因而可实现高速循环成形作业。  
Change the common slide block into "flexible core control device" as adopted flexible core, another side's matched components (guide post, locking blocks and so on) were no need anymore, to let it easy in stalled. Besides, it reduce the size of mold, but safe and smooth, so it can realise high speed cycle molding.

滑块改为“活型芯控制装置”